

SUPERPLUS

Semi-automatic.
Fully advanced.


C-One Superplus combines the flexibility of a semi-automatic wrapper with advanced features designed to simplify every operation.

Built on a low-profile turntable, it ensures easy and efficient pallet loading while integrating three key automatic systems: film clamping, cutting, and sealing. These functions eliminate the need for manual film handling, improving consistency and reducing operator effort.

With infrared and radio remote control, the operator can manage the entire wrapping cycle with ease, staying at a safe distance while maintaining full control of the process. Robust, practical, and engineered for demanding environments, C-One Superplus enhances semi-automatic wrapping by adding automation where it matters most.

Technical Data

- ↓ Height: **2476 mm** Max: **2722 mm**
- ↔ Width: **1650 mm**
- ↗ Length: **2800 mm**
- ↻ Turntable Height: **76 mm**
- 📦 Weight: **520 Kg**
- ⚡ Power supply: **230 VAC**
- ⚡ Power absorption: **0,8 kW**

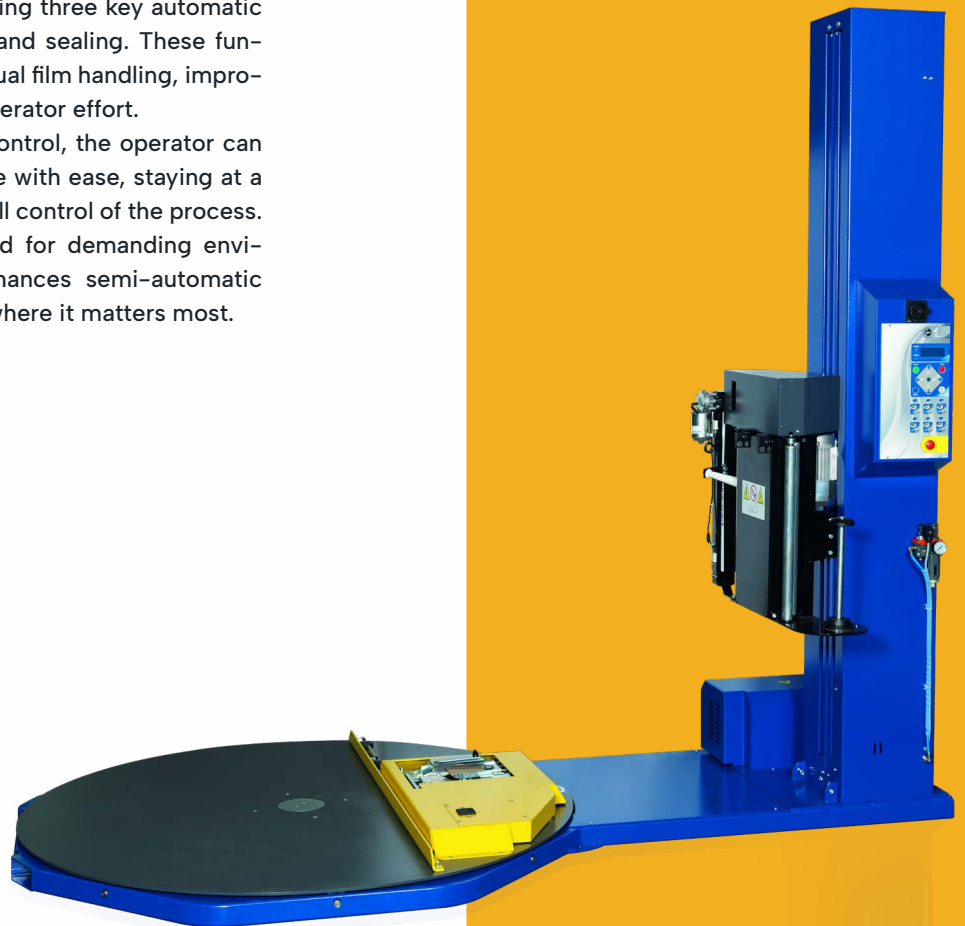

SUPERPLUS

PRODUCT SPECIFICATIONS

- ➔ Automatic cycle for film hooking, pallet wrapping, film cold cutting and film hot sealing
- ➔ Air device to blow up the film tail
- ➔ Electronic printed circuit board for the management of the cycle
- ➔ Frequency controller for carriage speed adjustment
- ➔ Frequency controller for turntable speed adjustment
- ➔ Loading plate ø 1650 mm
- ➔ Maximum height of pallet: 2200 mm
- ➔ Maximum size of the pallet: 800x1200 mm
- ➔ Maximum loading weight: 2000 kg
- ➔ Photocell for pallet height detection
- ➔ Safety stop at the base of the carriage
- ➔ Stop at 0 position
- ➔ Power board IP54
- ➔ 3 password levels (including lock password)
- ➔ Adjustable parameters by the control panel without password: cycle selection, bottom laps,
- ➔ top laps, topsheet cycle parameters, rotation speed, carriage ascent speed,
- ➔ carriage descent speed, film tension, starting wrapping height
- ➔ Quick selection of 6 main parameters or saved programs
- ➔ USB port to upload software and download settings and reports
- ➔ Statistics
- ➔ 3 working cycles: ascent/descent; topsheet; layers
- ➔ Storage of 32 end user programs
- ➔ 3 working ways: semimanual, semiautomatic, fixed height
- ➔ Strengthening operation
- ➔ Acoustic warning at the cycle beginning and stop
- ➔ Autodiagnostic
- ➔ Wrapped pallet counter
- ➔ Powder coating
- ➔ Braked turntable at the end of the cycle

MAIN OPTIONS

- ➔ Touch screen panel
- ➔ Top-press
- ➔ Adjustable power pre-stretch
- ➔ 3000 mm max wrapping height
- ➔ 1800 mm turntable
- ➔ 2000 kg max pallet weight
- ➔ Remote control
- ➔ Ramp
- ➔ Pit frame
- ➔ Photocell for dark loads
- ➔ Weighing system
- ➔ Mechanical system to brake roll containers
- ➔ Feet under the machine
- ➔ Safety fences

C&C group s.r.l.
via Calcinaro 2071
47521 Cesena (FC) - Italy
+39 (0)547 324747


P.IVA e Cod. Fisc. 03434700401
SDI: T04ZHR3
PEC: cecgroupsrl@pec.it
info@cecgroupsrl.com




Control Panel



Power Pre-Stretch
Carriage with
Roping System



Sealing Unit

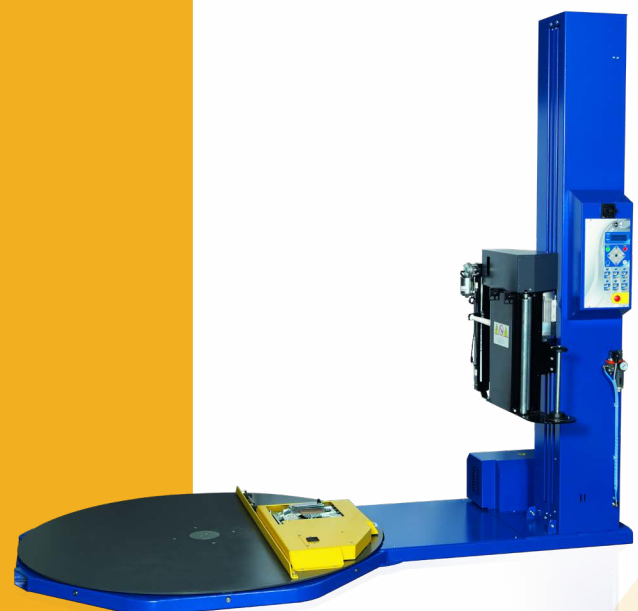

www.cecgroupsrl.com